

SANT HYDRANT VALVE SINGLE OUTLET (Oblique Type)

SALIENT FEATURES

Eliminates Theft Problem Being Low Resale Value.
No Corrosion As Highly Corrosion Resistant.
Excellent Finish Due To Investment Casting Robust
Construction For Safety
Excellent Durability & Low Maintenance
Pull Out Type/ Quick Release Lug For Easy
Operation

PRODUCT DESCRIPTION

Size : 63mm

Material : Stainless Steel

Inlet : 75mm NB Flanged as per IS:1538

Outlet : Standard 63mm Female Instantaneous

Approval : IS: 5290 Type A **ISI Marked**



TESTING

Seat Test : 14 kg / cm² for 2.5 minutes


Body Test : 21 kg / cm² for 2.5 minutes

Flow Test : 900 LPM @ 7 kg / cm²

Working Pressure : Up to 10kg/cm²

PRODUCT SPECIFICATIONS

1. **BODY :** SS 304 (IS 3444 GR 1)
2. **SPINDLE :** SS (IS 6603)
3. **BONNET :** SS 304 (IS 3444 GR 1)
4. **GLAND NUT :** SS 304 (IS 3444 GR 1)
5. **FEMALE INST. OUTLET :** SS 304 (IS 3444 GR 1)
6. **TWIST TYPE LUG :** SS 304 (IS 3444 GR 1)
7. **HAND WHEEL :** CAST IRON (IS 210)
8. **Washer :** Rubber IS : 937 Type A

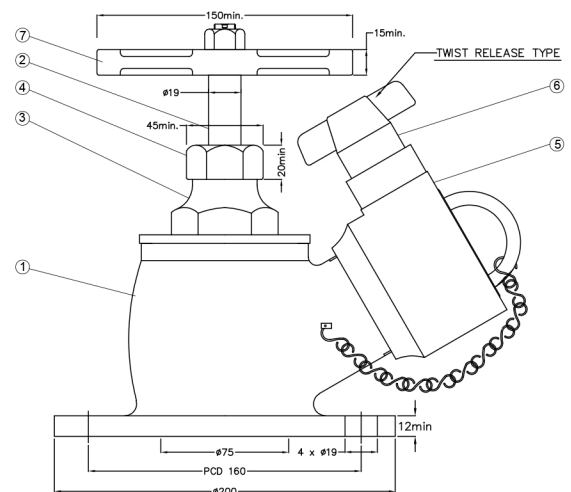

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.