

V4 Flanged Y-Type Strainer PN16, UL Listed

Product Description

Product Certification

UL Listed (EX 16202)

Connection Ends

Flange to BS EN 1092-2:1997

Working Pressure

PN16

Temperature Range

0°C – 100°C Rubber Gasket

Coating

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550




Materials of Construction

Part No.	Part	Standard Specification
1	Valve Body	EN-GJS-450-10
2	Screen	SS304 (Perforated)
3	Gasket	Rubber
4	Bonnet	EN-GJS-450-10
5	Plug	Malleable Iron Galvanized
6	Bolt	Carbon Steel Zinc Plated
7	Flat Washer	Carbon Steel Zinc Plated

Dimensions (in mm)

Inch	mm	L	D	D1	n-Ød
2"	50	230	165	125	4-Ø19
2.5"	65	290	185	145	4-Ø19
3"	80	310	200	160	8-Ø19
4"	100	350	220	180	8-Ø19
5"	125	400	250	210	8-Ø19
6"	150	480	285	240	8-Ø23
8"	200	600	340	295	12-Ø23
10"	250	730	405	355	12-Ø28
12"	300	850	460	410	12-Ø28
18"	450	1200	640	585	20-Ø31
20"	500	1250	715	650	20-Ø34
24"	600	1450	840	770	20-Ø37

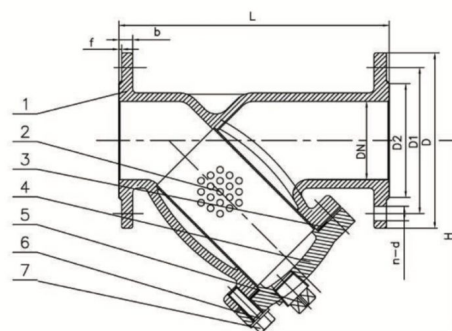

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.