




Standard Coverage, **Standard Response** (5mm Glass Bulb) & **Quick Response** (3mm Glass Bulb), K5.6, 1/2" Connecting Thread. UL Listed SANT Sprinklers are glass-bulb types designed for use in various commercial applications. The temperature range of 5mm and 3mm glass ball is from 135°F/57° C, 155°F /68° C, 175°F/79° C, 200°F/93°C up to 286°F/141° C.

Pendent Series Sprinklers

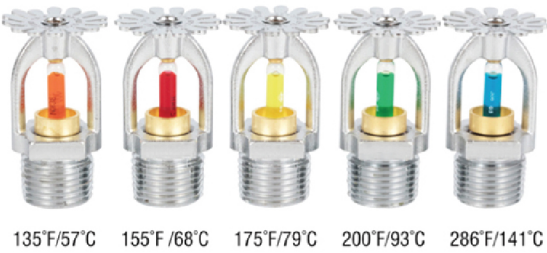



1. Frame 2. Button 3. Sealing Assembly
4. Glass Bulb 5. Compression Screw
6. SSP Deflector

Upright Series Sprinklers



1. Frame 2. Button 3. Sealing Assembly
4. Glass Bulb 5. Compression Screw
6. SSP Deflector

Horizontal Side Wall Series Sprinklers

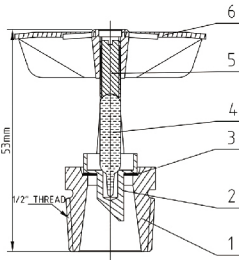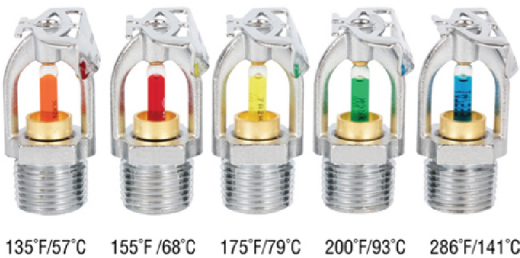

1. Frame 2. Button 3. Sealing Assembly
4. Glass Bulb 5. Compression Screw
6. SSP Deflector

Specification

Bulb Nominal Dia. & Response	05mm Standard Response 03mm Quick Response
Thread Size	NPT1/2" or BSPT1/2"
Nominal Orifice Size	1/2 Inch
Nominal K-Factor	5.6 [U.S.]/80 [metric]
Max. Working Pressure	175psig/1.2MPa [12bar]
Sprinkler Finish	Chrome Finished
Nominal Temp. Rating	135°F/[57° C] 155°F/[68° C] 175°F/[79° C] 200°F/[93° C] 286°F/[141° C]
Listing and Approvals	UL Listed

RECESSED ESCUTCHEON



SURFACE-MOUNTED ESCUTCHEON

