

IBR-13 Bronze Fusible Plug Screwed (IBR Approved)

Product Description

HSN 84814000

Product : 'SANT' Bronze Fusible Plug

Type of Pattern : Two piece design

Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B

End Details : Screwed male BSP Parallel threads to BS 21.

Note : Melting temperature of Fusible Alloy 270°C

Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.

Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm²)

Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Steam
-------	-------




Materials of Construction

Components	Materials	Specifications
Body, Cone	Bronze	IBR 282(a)(iv) Gr.B
Fusible Alloy	Lead-Tin Alloy	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F
15	1/2	52
20	3/4	62
25	1	75
32	1.1/4	86
40	1.1/2	90
50	2	97

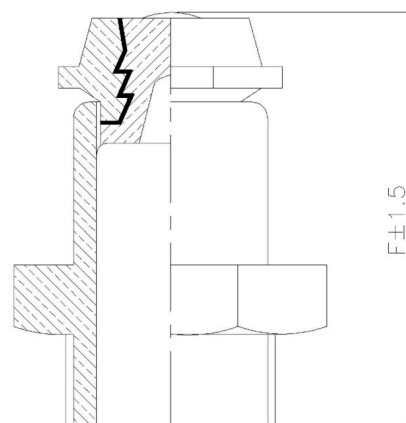

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.