

CI-7A Cast Iron Y-Type Strainer Flanged (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Cast Iron Y-Type Strainer

Type of Pattern : Y-Type

Body Material cum Standard : Cast Iron IBR 86 to 93 Gr.A

Description : Bolted Cover

Trim : SS-304 Screen having 1.2 mm dia perforation

End Details : Flanges as per BS 10 Table F, FF undrilled

Testing & Certification

Test Pressure : 300 Psig.Hyd.

Working Pressure : Max BOP 10.54Kg/cm²g (150 Psig.) at 220° C Steam

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Oil	Steam
-------	-----	-------




Materials of Construction

Components	Materials	Specifications
Body, Bonnet	Cast Iron	IBR 86 to 93 Gr.A
Drain Plug for 25mm & above	Bronze / SS	IBR 282(a)(iv) Gr.B / AISI-410
Strainer	S.S.	AISI-304
Gasket	Compressed Asbestos Fibre	IS:2712 Gr.C
Fasteners	Mild Steel	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F
25	1	162±1
40	1.1/2	206±2
50	2	210±2
65	2.1/2	248±2
80	3	270±2
100	4	381±2
125	5	416±2
150	6	451±2
200	8	523±3

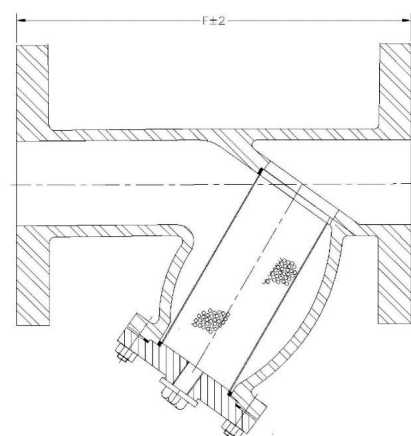

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.